

HS-210 Temperature Sensor



only temperature output via 3 Pin MS Connector

Key Features

- Temperature output
- For use with data collector
- Customizable features

Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

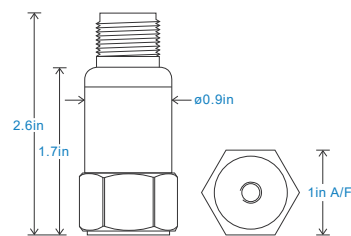

Technical Performance

Temperature Output	10 mV/°C standard 212°F - Option 302°F
Isolation	Base isolated

Mechanical

Case Material	Stainless Steel
Mounting Torque	5.9ft. lbs
Weight	4.4 oz. (nominal) body only
Shielded Cable Assembly	see: www.hansfordsensors.com for options
Connector	HS-AA005 - non-booted HS-AA068 or HS-AA069 - booted
Mounting Threads	see: 'How To Order' table

Electrical

Operating Voltage	4-30 VDC
-------------------	----------


Environmental

Operating Temperature Range	-67°F to see: 'How To Order' table for max
Sealing	IP68
EMC	EN61326-1:2013


Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

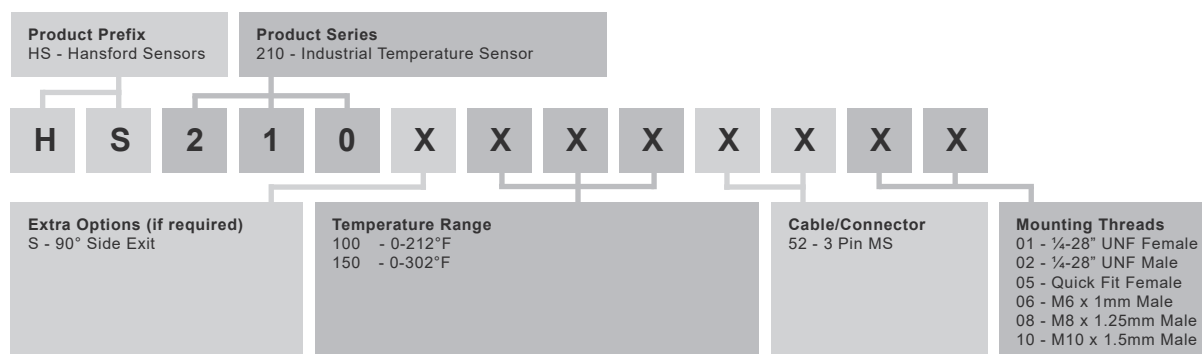

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS385U.6

