

HS-429 Vibration Trip

4-20mA velocity and switch output via M12 Connector

Key Features


- Compact vibration switch
- Retransmit 4-20mA signal
- False trigger delay
- Overload protected

Industries


Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical





Product dimensions

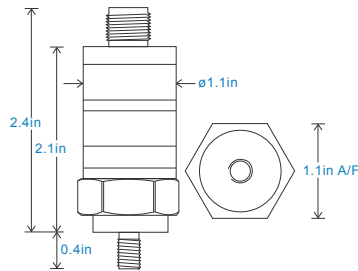

Dimensions with included protective cover

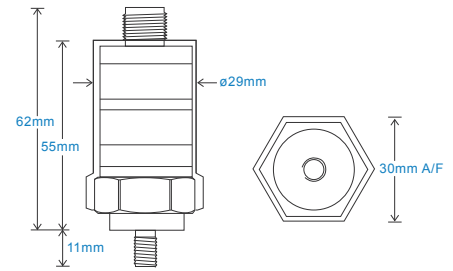

Connection details



Technical Performance

Velocity Ranges	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 72°F
Frequency Response	10Hz (600cpm) to 1kHz (60kcpm)
False Trigger Delay	Adjustable up to 60 seconds
Trip Setting	Fully adjustable

Mechanical

Case Material	Stainless Steel 316L/Plastic
Mounting Torque	11.1ft. lbs
Weight	4.1 oz. (nominal)
Screened Cable Assembly	HS-AC010 - straight HS-AC011 - right angle
Mounting Threads	M8 x 1.25mm male
Protective Plastic Casing	PP Polypropylene (transparent)


Electrical

Current Output	4-20mA DC proportional to Velocity Range
Supply Voltage	18-32 Volts DC
Switching Output	NC, PNP up to 500mA
Display OK LED	Green
Trip LED	Yellow
Current Consumption	18-30volts DC at 50mA



Environmental

Operating Temperature Range	-13 to 176°F
Sealing	IP67
Maximum Shock	100g
EMC	EN61326-1:2013
Reverse Polarity	Protected
MTBF	510 years

How To Order

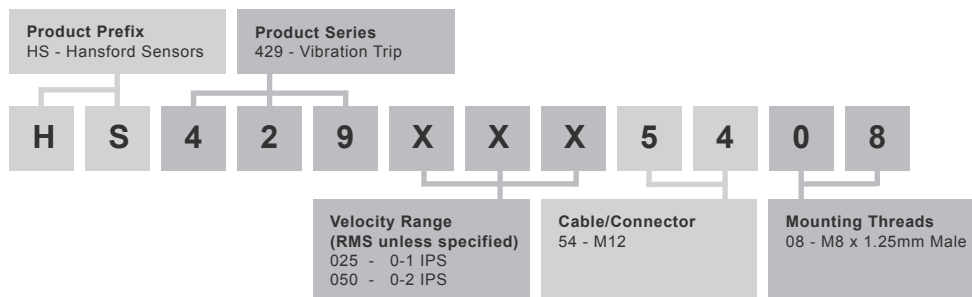

Screened Cable Assembly Details

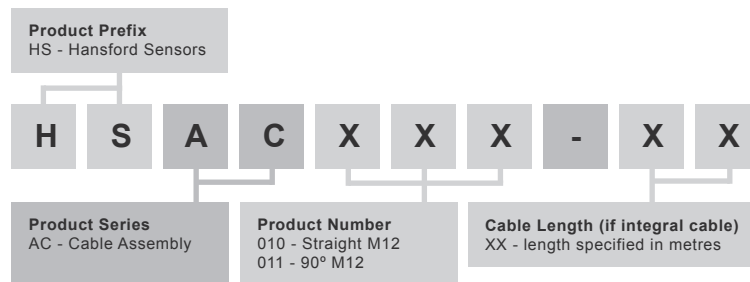

www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS434U.5

