


HS-570-60 Power Supply Module

Key Features

- Isolated Mains Power Supply
- For use with all HS-500 series
- Short circuit protected
- Capable of powering up to 20 modules

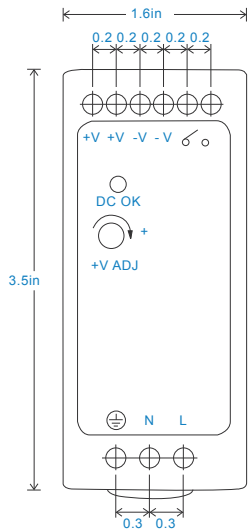

Technical Performance		Electrical	
Input Voltage Range	85 to 264 Volts AC	Output Power	see: 'How To Order' table
Output Voltage Range	24 Volts DC	Output Current	see: 'How To Order' table
		Overload Protection	Constant current protection, recovers automatically after fault condition is removed
Mechanical		Environmental	
Case Material	Plastic	Operating Temperature Range	-4 to 158°F
Mounting	DIN Rail TS35 (Top Hat)	Relative Humidity	20 to 90% RH
Dimensions	see: diagram	Emmision	EN55011, EN55022 (CISPR22), EN61204-3 Class B, EN61000-3-2, -3
Connections	Screw Clamp	Immunity	EN61000-4-2, 3, 4, 5, 6, 8, 11, EN55024, EN61000-6-1, EN61204-3, light industry level, criteria A
Conductor Size	0.02 to 0.2 in	Safety Standards	UL508, TUV EN60950-1 approved, NEC class 2 / LPS compliant
Weight	11.6 oz. (nom)		

How To Order

