
Connection Details of Cable Assembly



Materials of Cable: High Temperature FEP Cable					
Pos	Description	Dimension	Overall Diameter	Remarks	
1.	Tin plated copper conductor insulation of FEP	20 AWG	Copper 0.96 Insulation 1.47	19 x 0.2	
2.	Tin plated copper drain wire	20 AWG	3,8	Optimised: 85% min	
3.	Braided screen of tin plated copper wire		3.1		
4.	Jacket of FEP, blue	Thickness 0.35mm	4.5	Tube-Extruded	

Technical Data of Cable				
Technical Data	Values at 20°C	Unit		
Conductor Resistance	34	Ω/km		
Insulation Resistance	>5000	MΩ x km		
Capacitance	Nom: 89	pF/m		
Test Voltage	3	KV DC		
Voltage Rating	600/1000	V AC		
Capacitance	Core-core: 90	pF / m		
Weight	40	g/m		
Temperature Rating	-80 / +200	°C		

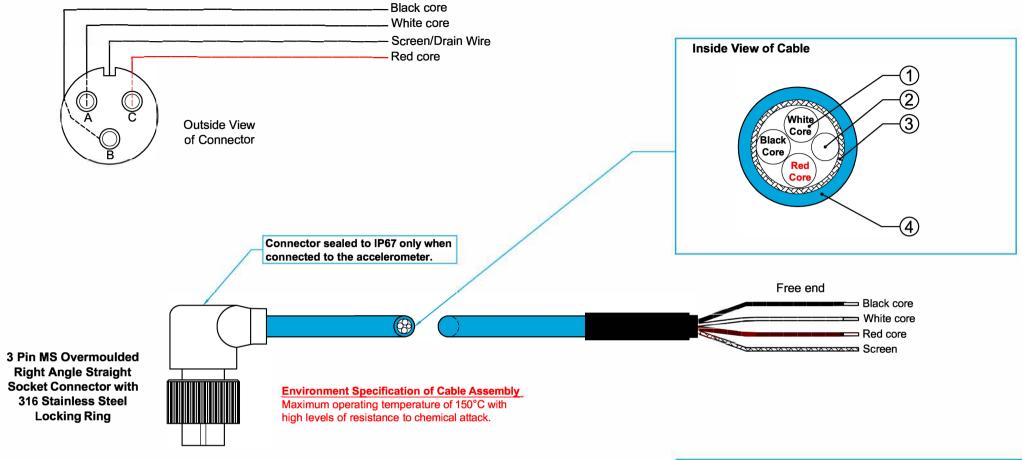

Tel: +44(0) 845 680 1957 Fax: +44(0) 845 680 1958

Email: sales@hansfordsensors.com
Web: www.hansfordsensors.com