
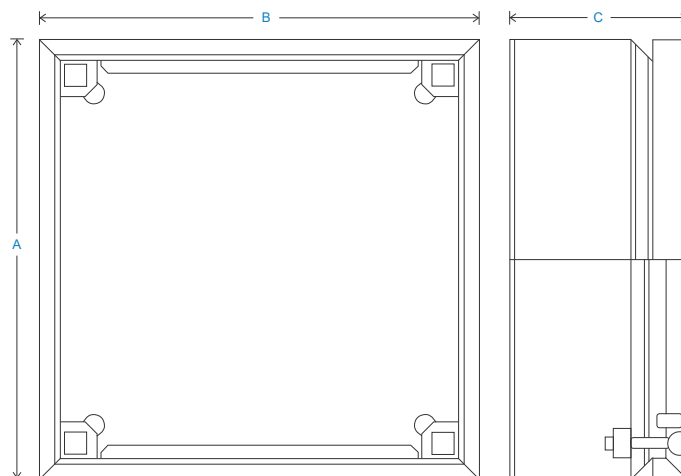


# HS-JE Junction Enclosure

Stainless Steel

## Key Features

- Accelerometer cable glanding
- Ease of installation
- Flexible combinations

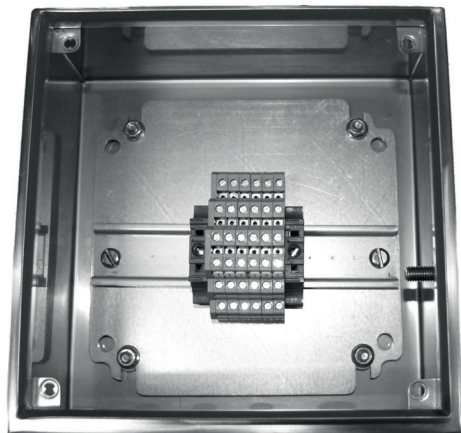

## Technical Performance

|                             |                                                                    |                                                              |                                                   |
|-----------------------------|--------------------------------------------------------------------|--------------------------------------------------------------|---------------------------------------------------|
| Inputs                      | Accelerometer cabling                                              | Glanding                                                     | Glands supplied but not fitted                    |
| Output                      | Multi-core glanding                                                |                                                              | Holes are punched for:                            |
| Material                    | 304 Stainless Steel                                                |                                                              | Single input M12 - $\varnothing 0.1-0.3$ in cable |
|                             | (alternatives can be specified in options of 'How To Order' table) | Single input M20 - $\varnothing 0.3-0.7$ in multi-core cable | Multi input M20 - 3 x $\varnothing 0.2$ in        |
| Dimensions                  | see: 'How To Order' table                                          | Labelling                                                    | Channel locations - other                         |
| Sealing                     | NEMA 4X                                                            | Mounting                                                     | labelling available upon request                  |
| Termination                 | Klippon Type                                                       | EMC                                                          | supplied are 4 x Brackets                         |
| Operating Temperature Range | -20 to 110°C                                                       |                                                              | EN61326-1:2013                                    |

## How To Order

