



Connection Details of Cable Assembly

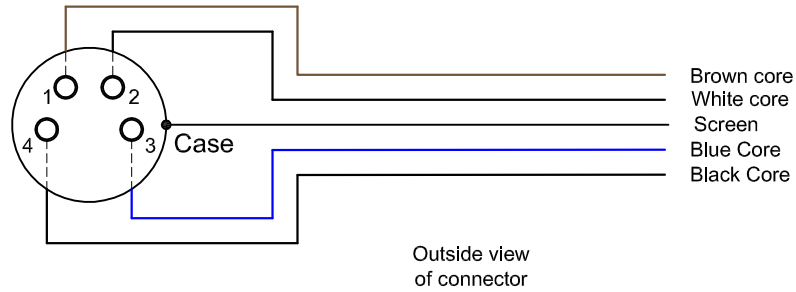

Inside View of Cable

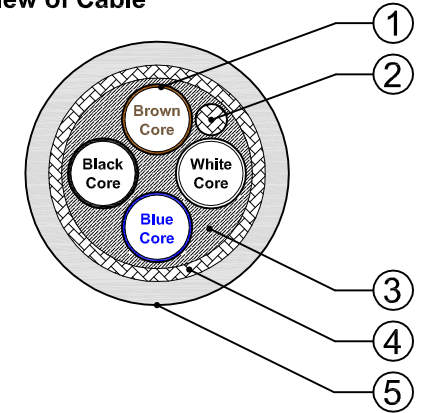

HS-AC051
M8 4 Pole
Straight Connector



HS-AC052
M8 4 Pole
Right Angle Connector



Connector sealed to IP66 only when connected to the accelerometer.

Free end

Brown core
White core
Screen
Blue core
Black core

Materials of Cable

Pos	Description
1.	Conductor, bare soft copper wire
2.	Screen wire, tinned copper
3.	Stranding, 4 cores surrounding a woollen inner core
4.	Screen, tinned copper
5.	Outer sheath

Technical Data of Cable

Technical Data	Values at 20°C	Unit
Insulation Resistance	>10 ⁹ Ω	Ω
Operating Voltage	max.30V	V
Operating Temperature Range	-30°C to + 90°C	°C