

HS-483T Triaxial Accelerometer


4-20mA acceleration and temperature outputs via 8 core PUR cable

Key Features

- For use with PLC/DCS systems
- Customisable features
- Waterproof


Industries

Building services, Pulp and Paper,
Mining, Metals, Utilities, Automotive,
Water, Pharmaceutical

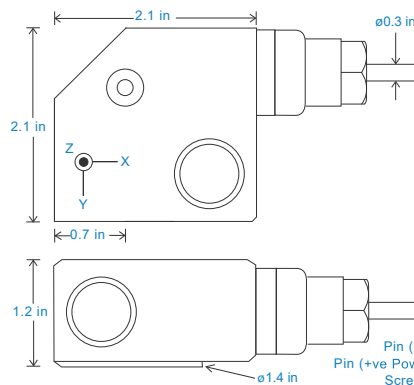

Connection Details

White: Power: X
Brown: 0V: X
Yellow: Power: Y
Black: 0V: Y
Blue: Power: Z
Red: 0V: Z
Green: Temperature Supply
Purple: Temperature 0V



Technical Performance

Mounted Base Resonance	17kHz (nominal)
Acceleration Ranges	see: 'How To Order' table $\pm 10\%$ Nominal 80Hz at 72°F
Frequency Response	10Hz (600cpm) to 5kHz (300kcpm) $\pm 5\%$ - ISO10816
Isolation	Base isolated
Range	see: 'How To Order' table
Temperature Output	10mV/°C - 0-1V proportional to 0-100°C
Transverse Sensitivity	Less than 5%

Mechanical

Case Material	Stainless Steel
Sensing Element/Construction	PZT/Shear
Mounting Torque	8Nm
Mounting Bolt Provided	see: 'How To Order' table x 37mm long
Weight	18.7 oz. (nominal) body only
Maximum Cable Length	3,280 ft.
Standard Cable Length	16 ft.
Screened Cable	PUR - length to be specified with order
Mounting Threads	see: 'How To Order' table
Submersible Depth	328 ft. max (10 bar)


Electrical

Current Output	4-20mA DC proportional to acceleration
Supply Voltage	15-30 Volts DC (for 4-20mA)
Settling Time	1 second
Output Impedance	Loop Resistance 600 Ohms max. at 24 Volts
Case Isolation	$>10^8$ Ohms at 500 Volts

Environmental

Operating Temperature Range	-22 to 194°F
Sealing	IP68
Maximum Shock	5000g
EMC	EN61326-1:2013


Typical Frequency Response

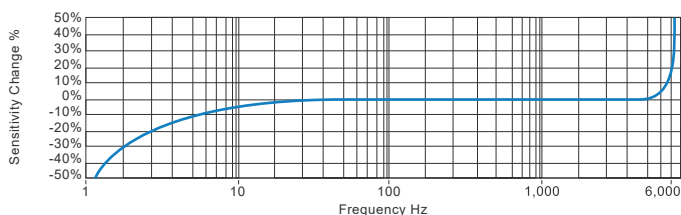

Applications

Fans, Motors, Pumps, Compressors,
Centrifuges, Conveyors, Air Handlers,
Gearboxes, Rolls, Dryers, Presses,
Cooling, VAC, Spindles, Machine Tooling,
Process Equipment

Vibration sensor should be firmly fixed to a flat surface
(spot face surface may be needed to be produced and
cable anchored to sensor body.)



How To Order

Product Prefix		Product Series										
HS - Hansford Sensors		483 - Industrial Vibration Sensor										
H	S	4	8	3	T	X	X	X	X	X	X	
Extra Options (if required)						Acceleration Range (RMS unless specified)			Cable/Connector		Mounting Threads	
F - Filtered L - 316L Stainless Steel RT - Temperature Output PT100 T - Temperature Output						P - Peak Range PP - Peak to Peak Range			43 - 8 Core PUR		02 - 1/4-28" UNF Male 06 - M6 x 1mm Male 08 - M8 x 1.25mm Male	
						001 - 0-1g 002 - 0-2g 005 - 0-5g 010 - 0-10g 100 - 0-100g						



www.hansfordsensors.com
sales@hansfordsensors.com

We reserve the right to alter the specification of this product without prior notice
TS1527U.1

