


Connection Details of Cable Assembly


- Pin 1 (X) = ECTA E
- Pin 2 (Y) = ECTA D
- Pin 3 (Z) = ECTA C
- Pin 4 (0V) = ECTA B

Inside View of Cable

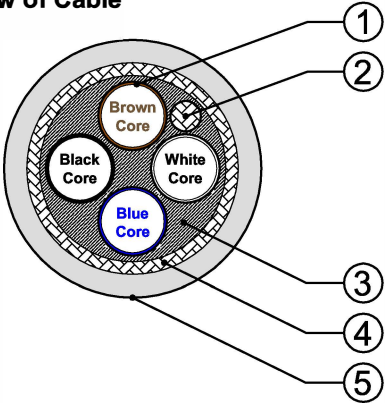

Connector sealed to IP66 only when connected to the accelerometer.

M12 4 Pole Straight Connector

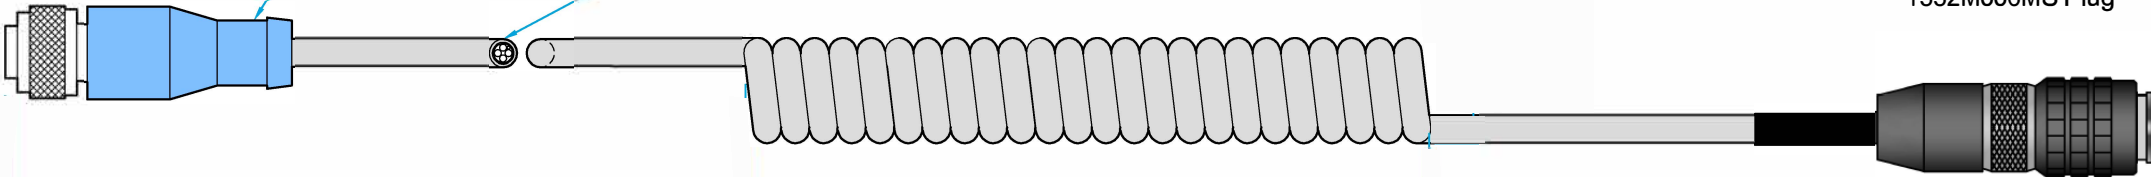

ECTA 113
1332M006MS Plug

Materials of Cable: C01-048 Screened PUR Coiled Cable

Pos	Description	Dimension	Overall Diameter	Remarks
Cable description: LiF9YHC11YH 4 x 0.34mm2 with drain wire qualified for drag chains acc. to UL/CSA 20233		Bending radius	min.10 x outer-Ø	Moving
1.	Conductor, bare soft copper wire		min. 5 x outer-Ø	Fixed installation
2.	Screen wire, tinned copper		0.10mm	acc. to VDE 0295, cl 6
3.	Stranding, 4 cores surrounding a woollen inner core		0.20mm	
4.	Screen, tinned copper			Lengh of lay approx 43mm drain wire
5.	Outer sheath, Polyether-Polyurethane PUR11Y Flame retardant acc. to VDE 0472, Part 804/B Oil resistant acc. to VDE 0472, Part 803 Halogen free, free of silicone, seawater-resistant			Coverage: 84% min
6.	Weight of Cable.		5.9 ±0,2mm	Grey similar to RAL7040
			170 Grams	

Technical Data of Cable

Technical Data	Values at 20°C	Unit
Resistance	≤57	Ω / km
Test voltage	2	KV
Normal voltage	300	V
Inductance	0.7	μH/m
Capacitance	Parallel wires: 66.7	pF/m
	Nonparallel wires: 63.1	
	Wire/screen: 120.0	
Temperature range	-40°C bis + 80°C	Moving
	-50°C bis + 80°C	Fixed installation